




AR (1500 - 2000)




BR (3000 - 4000)

AR

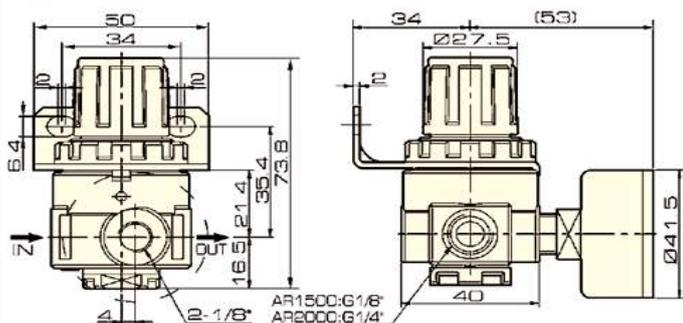

BR

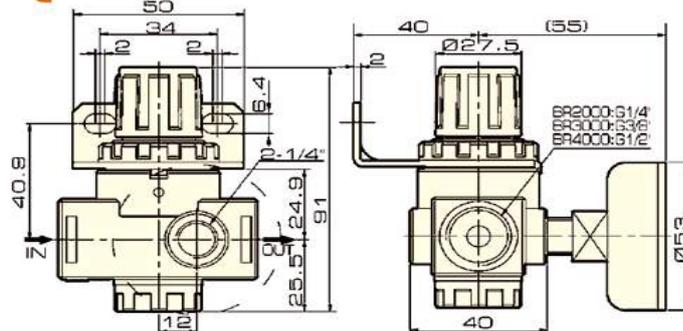

ESPECIFICAÇÕES


MODELO	AR 1500	AR 2000	BR 3000	BR 4000
ROSCA	G 1/8"	G 1/4"	G 3/8"	G 1/2"
FLUIDO	AR			
PRESSÃO DE TRABALHO	0,05 ~ 0,85 MPa			
PRESSÃO DE RUPTURA	1,2 MPa			
TEMP. DE TRABALHO	5 ~ 60			



JAR (1500 - 2000)



JAR (3000 - 5000)

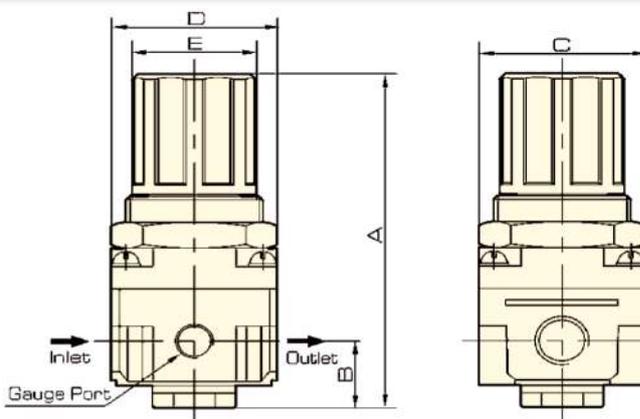

Modelo	Rosca	B	C	D	E
JAR 2000	1/8 - 1/4"	25	48	53	34
JAR3000	3/8"	35	53	53	40
JAR4000	1/2"	37,5	70	70	54
JAR4000	3/4"	40,5	70	75	54
JAR5000	1"	48	90	90	54

ESPECIFICAÇÕES

MODELO	JAR2000-01	JAR2000-02	JAR3000-03	JAR4000-04	JAR4000-06	JAR5000-10
		G 1/8"	G 1/4"	G 3/8"	G 1/2"	G 3/4"
FLUIDO	AR					
PRESSÃO TRABALHO	0,05~1,0 MPa					
PRESSÃO DE RUPTURA	1,5 MPa					
TEMP. DE TRABALHO	5~60					